



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H04Q 7/32		A1	(11) International Publication Number: WO 97/36443
			(43) International Publication Date: 2 October 1997 (02.10.97)
(21) International Application Number: PCT/US97/06378		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 26 March 1997 (26.03.97)			
(30) Priority Data: 626,744 27 March 1996 (27.03.96) US			
(71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US).			
(72) Inventors: BLAKENEY, Robert, D., II; 42315 Soda Creek Lane, Steamboat Springs, CO 80487 (US). WILLIAMSON, Paul, T.; 5331 Channing Street, San Diego, CA 92117 (US). AULT, Jan, C.; 9619 Cecilwood Drive, Santee, CA 92071 (US). SORENSON, John, R.; 11087 Roxboro Road, San Diego, CA 92131 (US).			
(74) Agents: MILLER, Russell, B. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).			

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND APPARATUS FOR PERFORMING PREFERRED SYSTEM SELECTION

(57) Abstract

A method and apparatus for selecting a communication system in accordance with the geographic region in which the subscriber station is located. Upon successful acquisition, the subscriber station examines the received system identification information to determine its geographical region. The subscriber station then determines whether the acquired system is the most desirable system for use in the geographical region. If it is the most desirable system for use in the geographical region, the subscriber station provides service using the acquired system. If it is not the most desirable system for use in the geographical region, the subscriber station attempts to acquire a more desirable system.

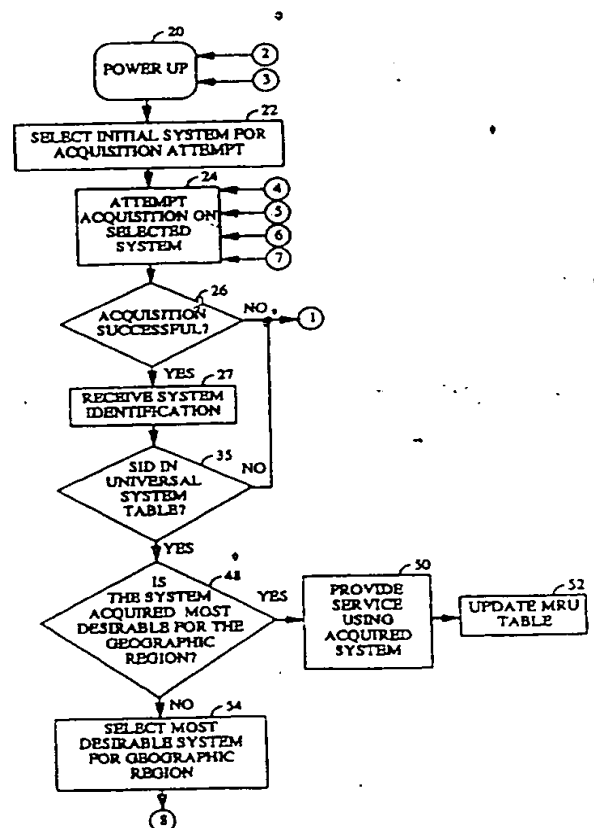

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR PERFORMING PREFERRED SYSTEM SELECTION

BACKGROUND OF THE INVENTION

5

I. Field of the Invention

The present invention relates to communication systems. More particularly, the present invention relates to a novel and improved method
10 and apparatus for selecting a preferred communication system in a subscriber station capable of operation in a plurality of geographical regions.

II. Description of the Related Art

15 As mobile communication systems become more prevalent in society the demands for greater and more sophisticated service have grown. To meet the capacity needs of mobile communication systems, techniques of multiple access to a limited communication resource have been developed. The use of code division multiple access (CDMA) modulation techniques is
20 one of several techniques for facilitating communications in which a large number of system users are present. Other multiple access communication system techniques, such as time division multiple access (TDMA) and frequency division multiple access (FDMA) are known in the art. However, the spread spectrum modulation technique of CDMA has significant
25 advantages over these modulation techniques for multiple access communication systems.

The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, issued February 13, 1990, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION
30 SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS", assigned to the assignee of the present invention, and is incorporated by reference herein. The use of CDMA techniques in a multiple access communication system is further disclosed in U.S. Patent No. 5,103,459, issued April 7, 1992, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL
35 WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", assigned to the assignee of the present invention and is incorporated by reference herein.

When the user of a subscriber station travels from one geographic area to another, the subscriber station must select a communications system

upon which to conduct services. There are two means by which a user may operate his subscriber station in differing geographic regions. By the first method, the user subscribes to communications services in a variety of regions. Thus, the subscriber station needs only to seek out a communications system to which the user subscribes and may provide services using any of those service providers.

Alternatively, the user may communicate by means of roaming service. Mobile communications providers negotiate contracts among themselves to provide services known as "roaming" to their customers. A "roamer" is a subscriber station which requires service in a system which is operated by a mobile communications service provider other than the ones to which the user subscribes. Currently when a subscriber station is roaming, a signal indicative of the roaming condition is provided to the user. A roaming determination is made as a result of a comparison of the system identification (SID) of the subscribed system or systems with the SID of the system providing service which is broadcast by that system. This alerts the user of the subscriber station that the service being provided is accruing roaming charges.

Because the subscriber station is generally without knowledge of the user's geographic location, it must select the system (from the possible communications systems of an area) which provides the optimum service to the user in terms of cost and quality of service. As the number of regions in which the user wishes to be able to operate increases, so does the number of different communications systems that the subscriber station must attempt to acquire. The present invention provides a method and apparatus for selecting the communication system best suited to the user's needs.

The present invention is described in a multi-mode subscriber station, such as is described in detail in copending U.S. Patent Application Serial No. 08/509,719, entitled "METHOD AND APPARATUS FOR SYSTEM DETERMINATION IN A MULTI-MODE SUBSCRIBER STATION", which is assigned to the assignee of the present invention and is incorporated herein by reference. The exemplary embodiment is illustrated in the context of a subscriber station capable of transmitting and receiving CDMA signals and capable of transmitting and receiving analog signals, such as AMPS and NAMPS. The present invention is equally applicable to any digital communication system including TDMA, FDMA and GSM. In addition, the present invention is equally applicable to subscriber stations capable of operation in only one mode (e.g. analog or digital)

SUMMARY OF THE INVENTION

In the present invention, the subscriber station maintains a list of systems, some of which are 'preferred' systems (systems the subscriber station is allowed to use), and some of which are 'negative' systems (systems the subscriber station is not allowed to use). Associated with each system in the list is a system ID (SID), as well as corresponding acquisition parameters (band, frequency, mode, etc.). This list is referred to herein as the universal system table.

The universal system table is maintained in such a manner that the subscriber station can readily determine which systems (preferred or negative) cover common geographical regions. The references to common geographic regions refers to areas of common radio coverage. Moreover, the systems that cover a common geographical region are prioritized (i.e., ranked from most desirable to least desirable). The subscriber station's job is to attempt to acquire service on the most desirable system in the subscriber station's current geographical area. There is no point in trying to acquire service on a system outside of the subscriber station's current geographic region, since systems typically provide service only within a limited geographic region.

The problem is that the subscriber station does not necessarily know where it is when it powers on. Due to roaming, it could be in an entirely different region than it was previously. Therefore, it may not be obvious how to acquire any system, let alone the most desirable system. In the exemplary embodiment of the present invention, the subscriber station maintains a list of the most recently used (MRU) systems. As a first measure, attempting to acquire one of these systems makes a lot of sense, because there is a good chance that the subscriber station is currently somewhere that it has been in the not too distant past.

If the subscriber station cannot acquire an MRU system, then it can try to acquire any preferred system in the universal system table, using the appropriate acquisition parameters. In the exemplary embodiment, the subscriber station first attempts acquisition on the 'easiest' to acquire systems, (e.g., AMPS systems assuming there are any AMPS systems in the universal system table). In the exemplary embodiment, if the subscriber station is unable to acquire one of these systems, then the subscriber station attempts to acquire a system which is 'most representative' of systems in the universal system table. In other words, the universal system table will probably contain numerous systems which differ only with respect to their

SIDs. and their geographical regions, but having identical acquisition parameters (e.g., channel number or frequency block designator).

Once the subscriber station acquires a system, the subscriber station can pick up the acquired system's SID from an overhead message. The subscriber station uses the received SID to determine the geographic region in which it is located. In the exemplary embodiment, the subscriber station can obtain this geographic information from the universal system table whether the acquired system is preferred or negative.

If the SID belongs to a preferred system in the universal system table that is a most desirable system within its geographical region, the subscriber station provides service using that system. If the SID of the acquired system belongs to a system in the universal system table that is not a most desirable system within its geographical area, the subscriber station uses the received SID to determine the geographic region in which it is located. The subscriber station attempts to acquire a most desirable system in that geographical area, by sequentially making acquisition attempts on systems in the geographic region from most desirable to least desirable for the region.

If the SID belongs to a system not in the universal system table, the subscriber station attempts acquisition on other systems. The subscriber station may return to this system if the subscriber station fails to acquire a preferred system.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram of the exemplary multi-mode subscriber station in the present invention; and

FIG. 2 is a flow diagram illustrating the exemplary system selection process of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, when multi-mode subscriber station (MMSS) 1 is in a system determination substate, then the operations are conducted by system determination processor 8. In the system determination substate, system determination processor 8 selects the communication system upon which MMSS 1 is to attempt to perform acquisition and provides the necessary parameters to the acquisition circuitry. System determination processor 8 may be implemented as a microprocessor which functions under program control as discussed with reference to FIG. 2.

In the exemplary embodiment, MMSS 1 is a dual-mode subscriber station capable of both analog transmission and reception, using analog modulation and demodulation and processing circuitry (analog circuitry) 4, and digital transmission and reception, using digital modulation and demodulation and processing circuitry (digital circuitry) 6. In the exemplary embodiment, digital circuitry 6 is code division multiple access (CDMA) transmission and reception circuitry. However, other types of digital communication modes may be employed such as TDMA or GSM. The present invention is applicable to cellular communications systems, personal communication systems (PCS) and any other communication system which may provide service to a subscriber station capable of operation in a plurality of geographic regions.

The design of analog circuitry 4 is well known in the art and is described in detail in Mobile Cellular Telecommunications Systems by William C. Y. Lee. The exemplary embodiment of digital circuitry 6 is described in detail in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459.

Most recently used (MRU) table 9 contains a list of communication systems that have been most recently used by MMSS 1. In the exemplary embodiment, MRU table 9 is implemented in non-volatile memory which is retained even after MMSS 1 is powered down. Universal system table 11 contains system parameters for all communication systems which MMSS 1 "knows" exist. In the exemplary embodiment, universal system table 11 contains information regarding both preferred and negative systems and the systems are stored in accordance with their geographic region. In the exemplary embodiment, universal system table 11 is implemented in a non-volatile memory which is retained even after MMSS 1 is powered down.

In the exemplary embodiment, the systems stored in universal system table 11 are grouped according to geographic region, each system listed within a geographic group is then sequentially ordered from most desirable to least desirable. Criteria for ranking systems may, for example, include cost of service, quality of service, support of unique features, etc. For each system, universal system table 11 contains the system identification (SID) along with necessary acquisition parameters including band, frequency, mode and any other parameters necessary to perform acquisition. In the exemplary embodiment, each system listed is tagged with a indication of whether the system is a system the subscriber station is permitted to use (a preferred system) or a system which the subscriber station is not permitted to use (a negative system).

FIG. 2 is a flowchart illustrating the exemplary method of preferred system selection of the present invention. Upon power up (block 20), MMSS 1 enters the system determination substate and control is handed to system determination processor 8. In block 22, system determination processor 8 selects the initial system upon which to attempt acquisition, which in the exemplary embodiment is selected in accordance with systems listed in MRU table 9. In the exemplary embodiment, system determination processor selects the last system used to provide service as the system for initial acquisition. In an alternative embodiment, system determination processor 8 selects the system most frequently used by MMSS 1. In another alternative embodiment, system determination processor 8 selects the home system of MMSS 1.

In block 22, system determination processor 8 retrieves the necessary acquisition parameters from universal system table 11. If the system selected for initial acquisition is an analog system, system determination processor 8 provides acquisition parameters to analog circuitry 4 and provides necessary frequency information to transceiver 3. In block 24, MMSS 1 attempts to acquire the selected analog system. Transceiver 3 amplifies and down converts the signal (if present) received via antenna 5 in accordance with the frequency information provided by system determination processor 8. Analog circuitry 4 demodulates the signal in accordance with the acquisition parameters provided by system determination processor 8.

In block 22, if the selected system is a digital system, system determination processor 8 provides the necessary acquisition parameters to digital circuitry 6 and provides necessary frequency information to transceiver 3. In the exemplary embodiment, the digital system selected for acquisition is described as a CDMA system although as pointed out previously, the present

invention is equally applicable to the acquisition of other digital communication systems. In block 24, MMSS 1 attempts to acquire the selected CDMA system. Transceiver 3 down converts the signal (if present) received via antenna 5 in accordance with frequency information from system determination processor 8. Digital circuitry 6 demodulates the signal in accordance with the acquisition parameters provided by system determination processor 8. Demodulation of a CDMA signal is described in detail in the aforementioned U.S. Patent No. 5,103,459.

In block 26, if the acquisition attempt is unsuccessful, then control is returned to system determination processor 8 in block 25. In block 25, system determination processor 8 selects the next system to be acquired. In the exemplary embodiment, MMSS 1 first attempts to acquire all systems stored in MRU table 9. If MMSS 1 is unsuccessful at acquiring one of the systems stored in MRU table 9, then MMSS 1 attempts to acquire a set of systems identified to be "easy" to acquire. The easy to acquire systems are selected to be able to provide fast and easy identification of the geographical region, even though they may not be the most desirable systems within their respective geographic regions. In an alternative embodiment, MMSS 1 will first attempt to acquire an AMPS system before attempting to acquire a system in MRU table 9, since the availability of an AMPS system can be easily determined.

If MMSS 1 is unable to acquire an easy to acquire system, then acquisition is attempted on a "representative" system. A representative system is one which has acquisition parameters that are common to a plurality of other systems. Thus, by attempting acquisition on a representative system, MMSS 1 is in reality testing a set of geographical region hypotheses simultaneously. If none of these systems can be acquired, then MMSS 1 exhaustively attempts acquisition on the remaining systems in universal system table 11.

When acquisition of the system selected by system determination processor 8 is unsuccessful, the operation moves to block 28. Block 28 determines whether acquisition has been attempted on all systems in MRU table 9. If there are systems in MRU table 9 upon which acquisition attempts have not been made, then system determination processor 8 selects a system from MRU table 9 and selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above. Acquisition upon the selected system is then attempted in block 24 as described above.

If acquisition attempts have been made on all systems in MRU table 9, then MMSS 1 attempts acquisition on "fast acquisition" systems. An AMPS

system is a typical example of a fast acquisition system. Although AMPS systems provide service that is inferior to the service that CDMA systems provide in terms of equality of service, it is possible to acquire an AMPS system in shorter a period of time. In block 34, if MMSS 1 has not attempted to acquire all fast acquisition systems, then, in block 36, system determination processor 8 selects a fast acquisition system and retrieves the acquisition parameters from universal system table 11. System determination processor 8 selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above. Acquisition upon the selected system is then attempted in block 24 as described above.

If acquisition attempts have been made on all "fast acquisition" systems, then MMSS 1 attempts acquisition of a representative system. In block 42, if MMSS 1 has not attempted to acquire all representative systems, then, in block 38, system determination processor 8 selects a representative system and retrieves the acquisition parameters from universal system table 11. System determination processor 8 selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above. Acquisition upon the selected system is then attempted in block 24 as described above.

If acquisition attempts have been made on all "representative" systems in block 42, then MMSS 1 exhaustively attempts acquisition on the remaining systems in universal system table 11. In block 44, if there are preferred systems in universal system table 11 upon which acquisition attempts have not been made, then the flow moves to block 40. In block 40, system determination processor 8 selects a remaining preferred system upon which to attempt acquisition, and retrieves the acquisition parameters from universal system table 11 and selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above.

Acquisition upon the selected system is then attempted in block 24 as described above. If attempts to acquire all preferred systems have failed, then in the exemplary embodiment, MMSS 1 temporarily powers down to save battery power in block 46, then begins the process of preferred system selection over again at a later predetermined time, in block 20. There are several possible alternative courses of action. One possible alternative is that MMSS 1 simply powers down. A second possible alternative is that MMSS 1 begins the process of preferred system selection over again immediately. A third possible alternative, is that MMSS 1 indicates the failure and awaits user intervention.

Upon successful acquisition, MMSS 1 receives the system identification (SID) which is broadcast by the acquired system in block 27. The signal is received through antenna 5 and provided to transceiver 3 where the message signal is down converted and amplified. If the acquired system is analog, the message is provided to analog circuitry 4, which demodulates the signal in accordance with an analog demodulation format and provides the system identification information to system determination processor 8. If the acquired system is CDMA, the message is provided to digital circuitry 6, which demodulates the signal in accordance with a CDMA demodulation format and provides the system identification information to system determination processor 8.

In block 35, system determination processor 8 determines whether the received SID is one of the systems stored in universal system table 11. If the acquired system is unknown to MMSS 1, then the flow is passed back to block 25 and MMSS 1 attempts to acquire a different system. In the exemplary embodiment, the acquisition parameters of the acquired but unknown system are retained by system determination processor 8 and that system may be used if no preferred system can be acquired.

If the received system identification (SID) is listed as a "negative" system in universal system table 11, then system determination processor 8 passes control to block 25 and MMSS 1 attempts to acquire a different system. In a preferred embodiment, the acquisition parameters of the acquired system are retained by system determination processor 8 and that system is used if an emergency call is originated.

If the received system identification (SID) is listed in universal system table 11, then system determination processor 8 determines whether this is a most desirable system for the geographical area in block 48. It is envisioned that there may be more than one system, which is equally desirable for use by the subscriber station. If the acquired system is a most desirable system for the geographical region, then service is provided using the acquired system in block 50. Upon completion of service, system determination processor 8 updates MRU table 9, in block 52.

If the received system identification is not a most desirable system for the geographical region, then system determination processor 8 in block 54 selects a most desirable system for the region and selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above. In block 56, MMSS 1 attempts acquisition on a most desirable system in the geographical region. If acquisition is successful and the acquired system is the system the subscriber station was expecting to

acquire, in block 58, MMSS 1 provides service using the acquired system in block 60. In block 62, system determination processor 8 updates MRU table 9 upon completion of service.

If acquisition is unsuccessful, then in block 64, system determination processors 8 selects a next most desirable system for use in the geographic region. System determination processor 8 selectively provides the system acquisition parameters to analog circuitry 4, digital circuitry 6 and transceiver 3, as described above. This process repeats until acquisition is successful and MMSS 1 provides service using the acquired system in block 60. In the exemplary embodiment, if no systems can be acquired, in block 66, MMSS 1, MMSS 1 temporarily powers down to save battery power in block 68 and then begins the process of preferred system selection over again at a later predetermined time in block 20. There are several possible alternative courses of action. One possible alternative is that MMSS 1 simply powers
15 downs. A second possible alternative is MMSS 1 begins the process of preferred system selection over again immediately. A third possible alternative, is that MMSS 1 indicates the failure and awaits user intervention.

In an alternative embodiment, upon successful acquisition in block 48, system determination processor 8 determines if the system is preferred. If it is
20 a preferred system, then MMSS 1 provides service using the acquired system and intermittently re-enters the system determination substate to check if a more desirable system in the area can be acquired.

In the exemplary embodiment, the information stored in universal system table 11 provides a bit that indicates whether the associated system is
25 more desirable than the following listed system (bit = 1) or the same degree of desirability (bit = 0). This allows for multiple preferred systems within the same geographic region. Table 1 illustrates the exemplary method of indicating the level of desirability of the system within a geographic region.

Table 1

	SID	Geo Bit	More Desirable Bit
5	1111	0	1
	2222	0	0
	3333	0	0
	4444	0	1
	5555	0	0
10	6666	1	0
	7777	1	0
	8888	1	0

In Table 1, there are 2 different geographical regions present. Note that systems of a common geographic region are indicated by the geographic region bit (Geo Bit). Thus, the systems covering the first geographic region are 1111, 2222, 3333, 4444 and 5555, and the systems covering the second geographic region are 6666, 7777, and 8888. This is indicated by the flip in the polarity of the Geo Bit.

The desirability of a system within a geographic region is indicated by the polarity of the More Desirable Bit. Within the first geographic region, System 1111 is more desirable than System 2222. Systems 2222, 3333, and 4444 are equally desirable and all three are more desirable than 5555. Within the second geographic region, Systems 6666, 7777, and 8888 are all equally desirable. It should be noted that this method of indicating the geographic region which a system serves and the desirability of acquiring service through that system are exemplary and other methods of storing this information are possible.

In the Table 1 above, system 1111 may be referred to as a first preferred subset of SIDs for that geographic region. Systems 2222, 3333, and 4444 are equally desirable and may be referred as a second preferred subset of SIDs for that geographic region. Similarly, system 5555 may be referred the third preferred subset of SIDs for the geographic region. As noted above, in the exemplary embodiment of universal system table 11, the table consists of both preferred and negative systems. So, for example, that system 5555 could be a negative system and would not be referred to as a third preferred subset but rather would be an element of the negative set of system for that geographic area.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention.

The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments
5 shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

WE CLAIM:

CLAIMS

1. A method for selecting a system for acquisition in a subscriber
2 system, said method comprising the steps of:
receiving a system identification (SID) from a central communication
4 station; and
determining a geographic region from said received system
6 identification.

2. The method of Claim 1 wherein said step of determining said
2 geographical region comprises determining a set of central communication
stations providing service coverage for said geographical region.

3. The method of Claim 2 wherein said step of determining said
2 geographical region comprises the steps of:
comparing said received SID to list of SIDs stored in said subscriber
4 station; and
identifying said set of central communication stations in accordance
6 with said comparison.

4. The method of Claim 3 wherein said list of SIDs stored in said
2 subscriber station is sequentially ordered in accordance with a set of
predefined user preferences.

5. The method of Claim 1 further comprising the steps of:
2 comparing said received SID with a first subset of preferred SIDs from
a set of preferred SIDs for said geographic region; and
4 providing service using said central communication station when
said received SID is of said first subset of preferred SIDs.

6. The method of Claim 5 further comprising the steps of:
2 selecting an alternative system from said first subset of preferred SIDs;
and
4 attempting acquisition upon said alternative system when said
received SID is not of said first subset of preferred SIDs.

7. The method of Claim 6 further comprising the step of
2 providing service using said alternative system when said acquisition
attempt is successful.

8. The method of Claim 7 further comprising the steps of:
2 selecting a second alternative system from said set of preferred SIDs
for said geographic region in accordance with the predetermined selection
4 format when said acquisition attempt is unsuccessful; and
attempting to acquire said second alternative system.

9. The method of Claim 1 wherein said step of receiving said SID
2 from said central communication station comprises the steps of:
selecting an initial system to acquire;
4 attempting to acquire to said initial system; and
receiving said SID from said central communication station when
6 said acquisition attempt is successful.

10. Said method of Claim 9 further comprising the steps of:
2 selecting an alternative system upon which to attempt acquisition
when said acquisition attempt is unsuccessful; and
4 attempting acquisition upon said alternative system.

11. The method of Claim 10 wherein said step of selecting an
2 alternative system upon which to attempt acquisition is determined in
accordance with a set of most recently used systems.

12. The method of Claim 10 wherein said step of selecting an
2 alternative system upon which to attempt acquisition is determined in
accordance with a set of systems which are easily acquired.

13. The method of Claim 10 wherein said step of selecting an
2 alternative system upon which to attempt acquisition is determined in
accordance with a set of systems which have acquisition parameters
4 common to a plurality of other systems.

1/4

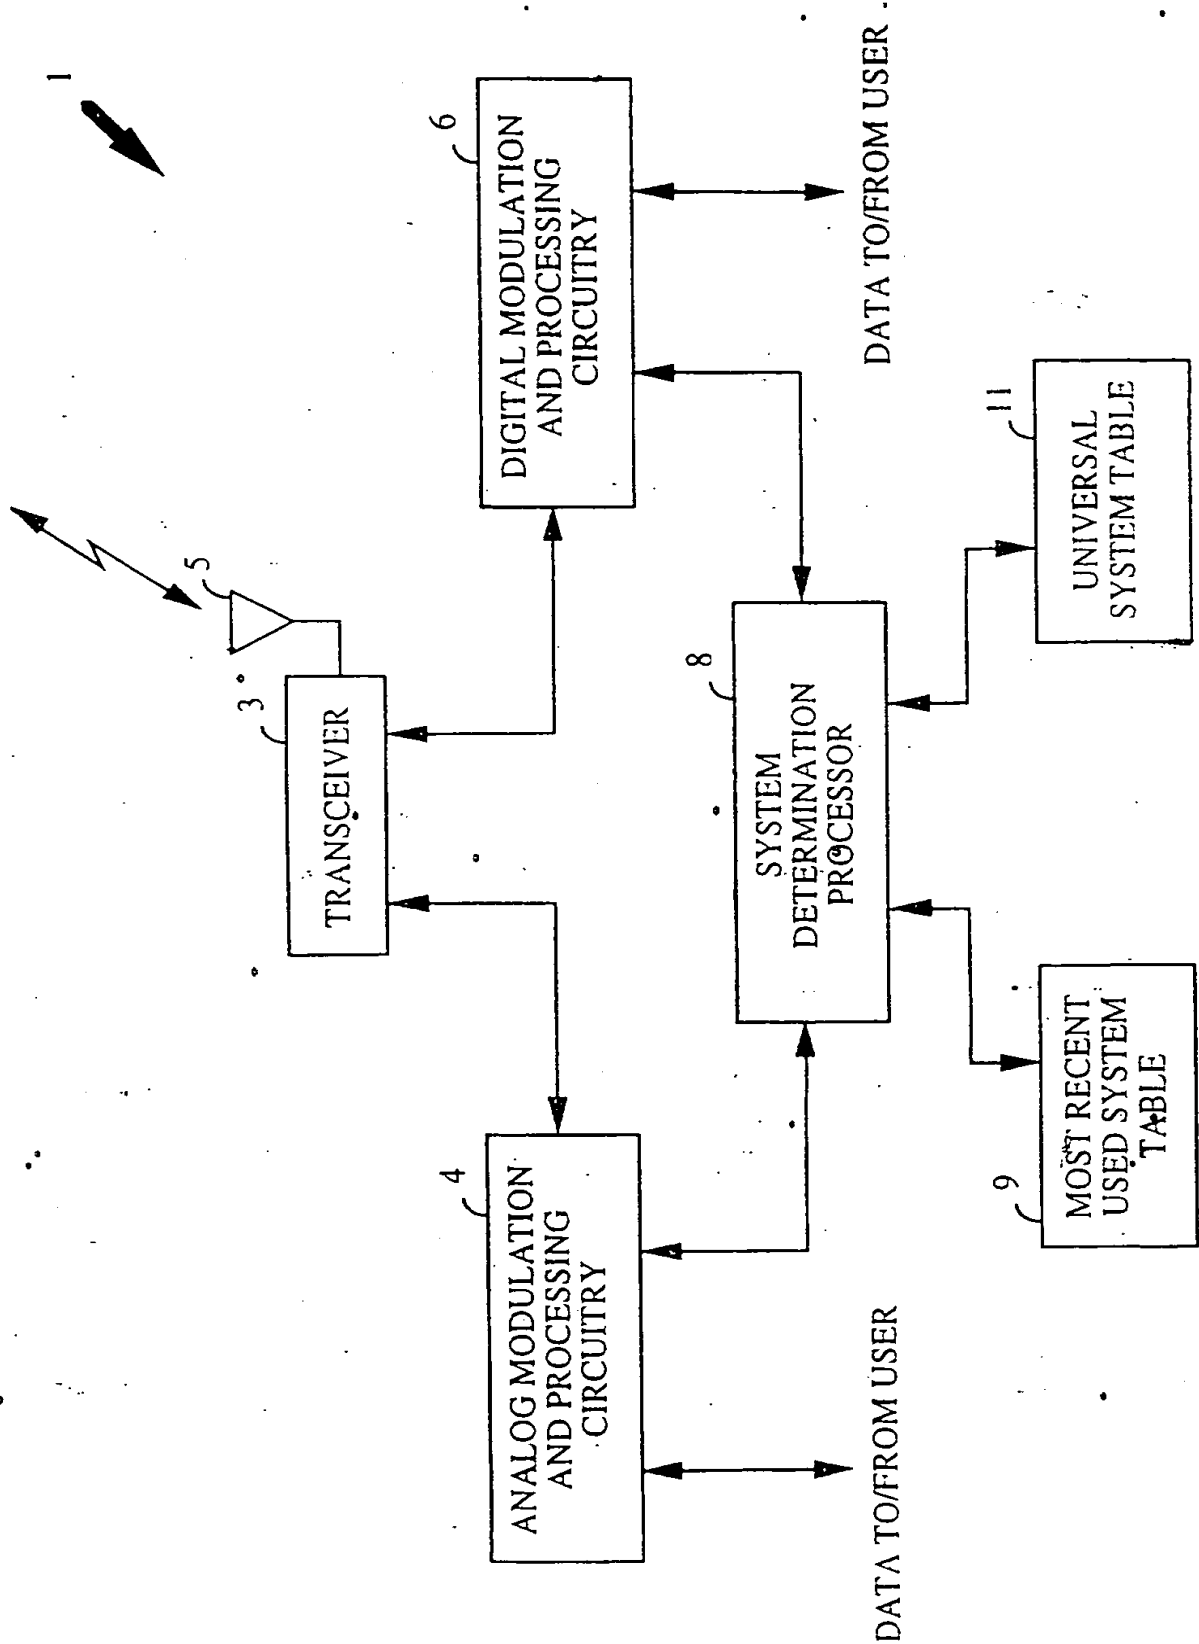


FIG 1

2/4

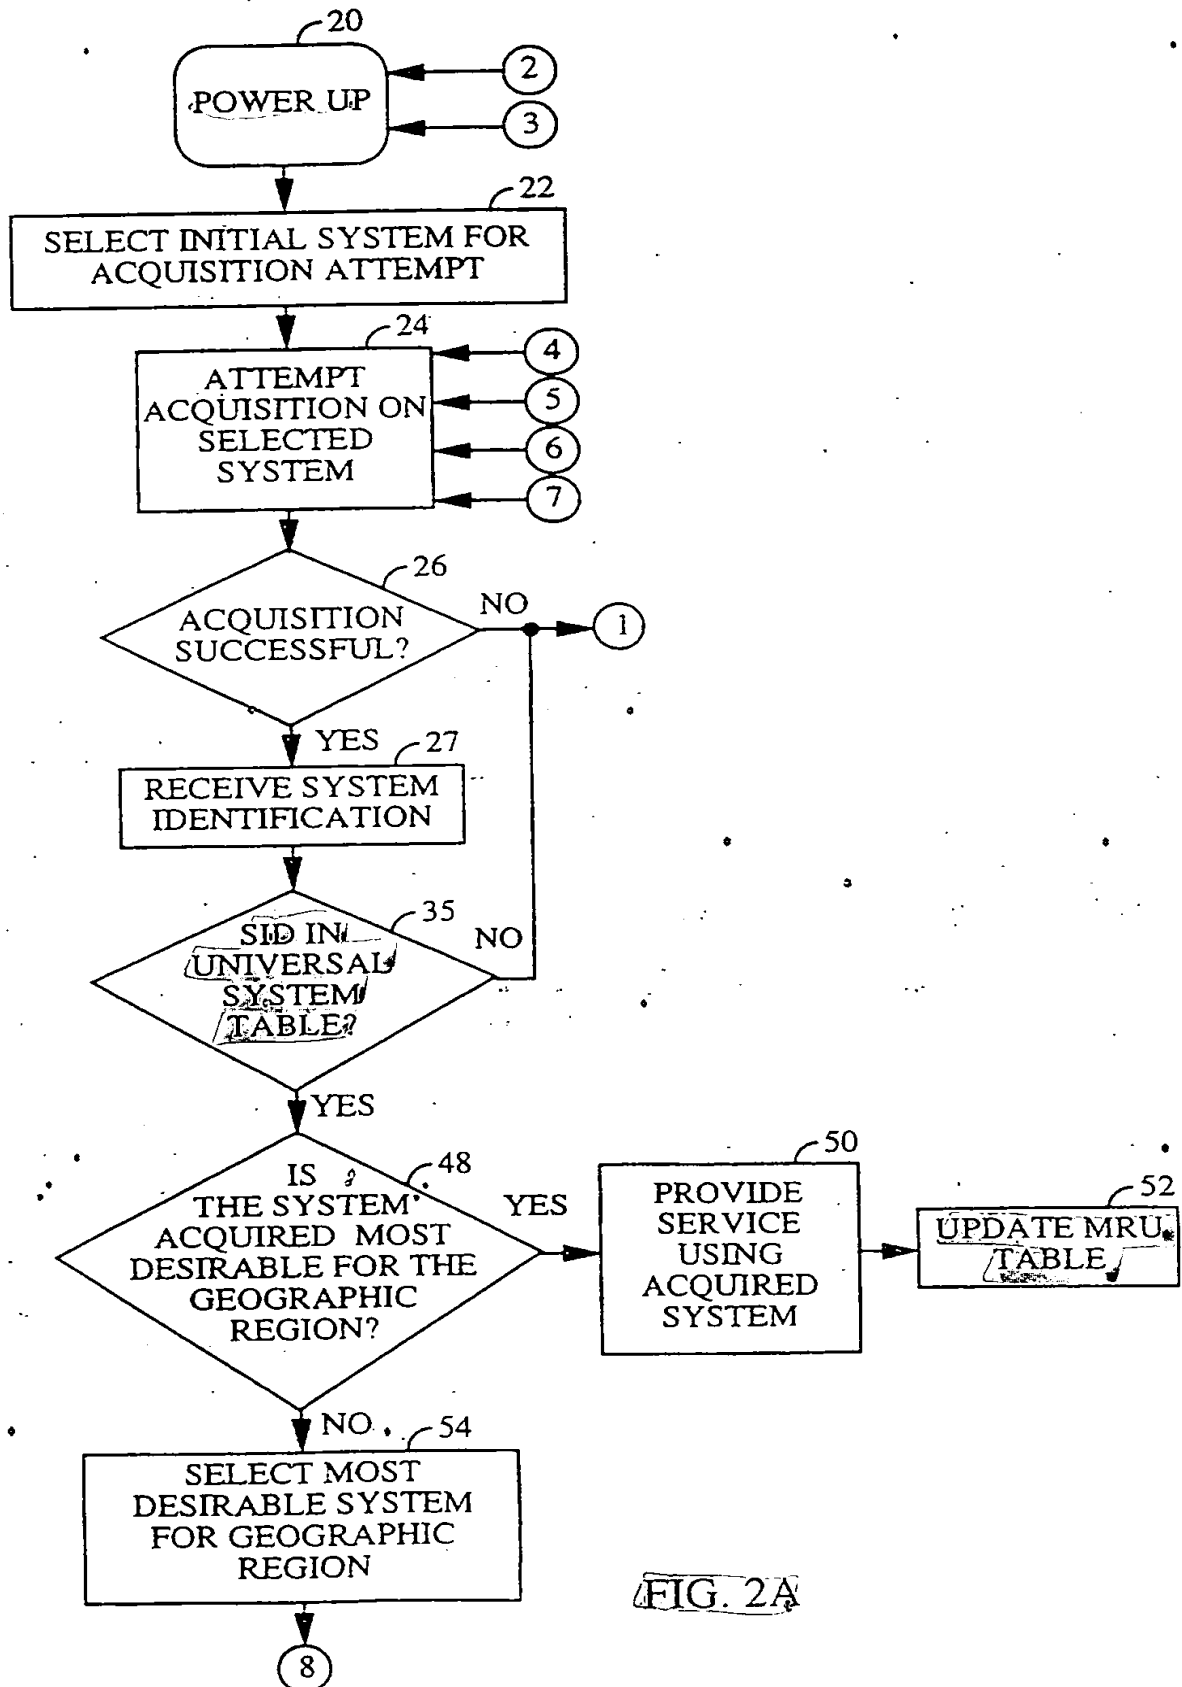


FIG. 2A

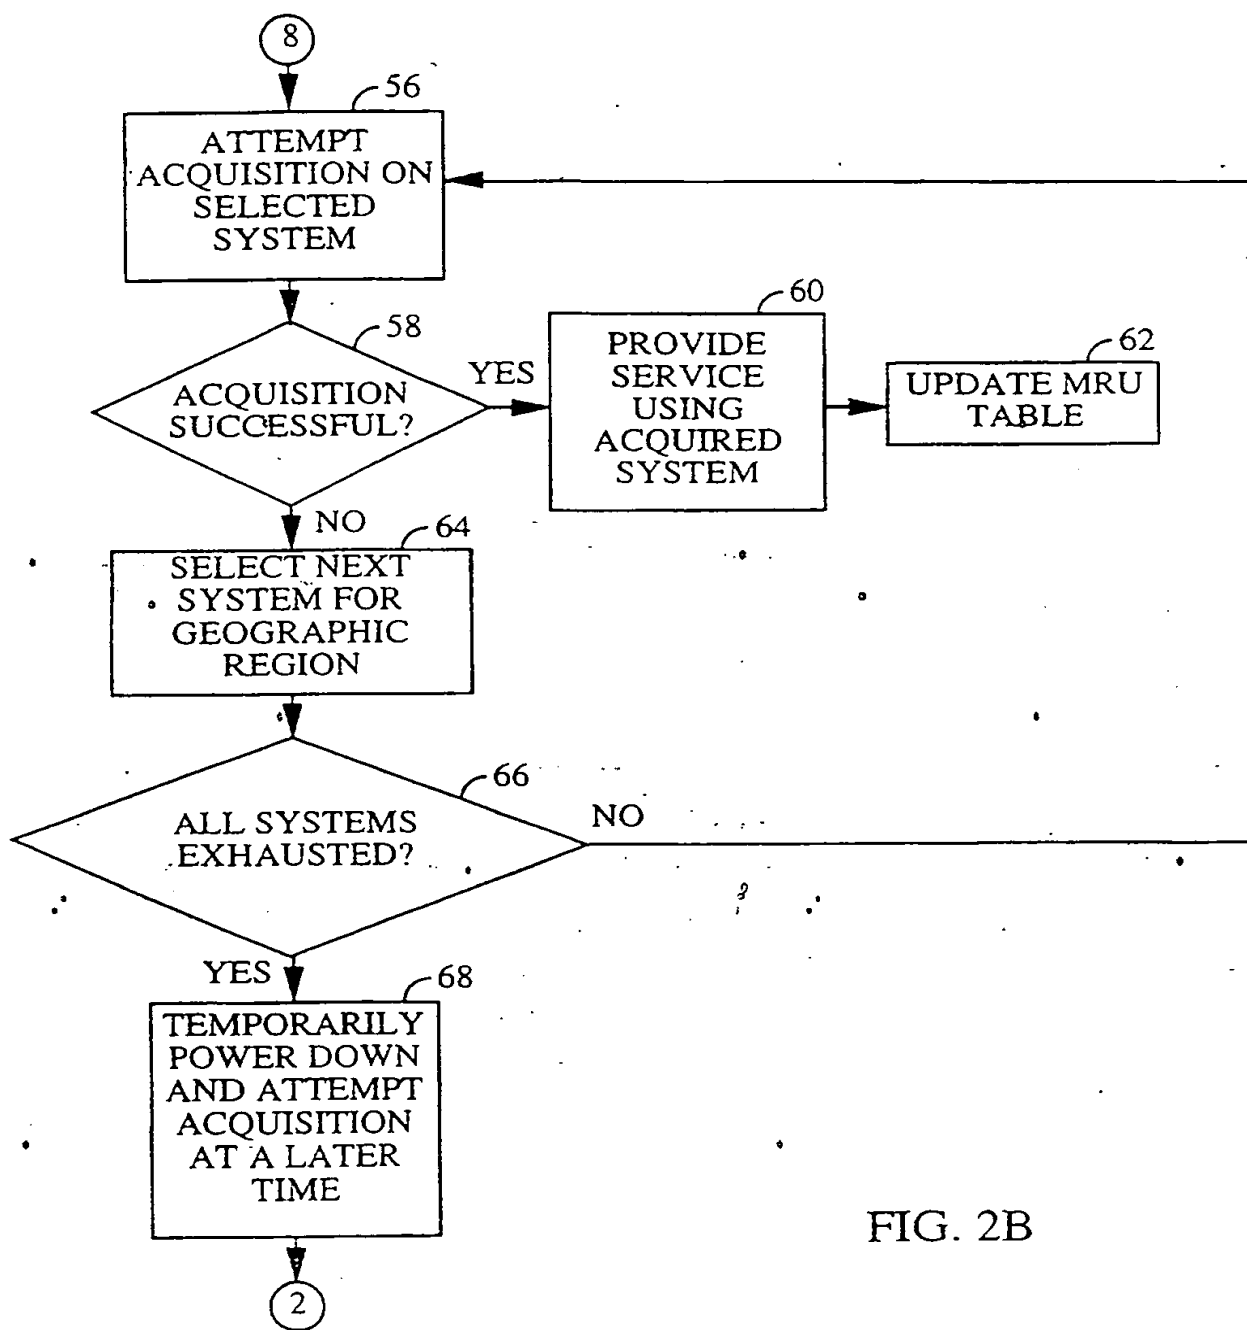


FIG. 2B

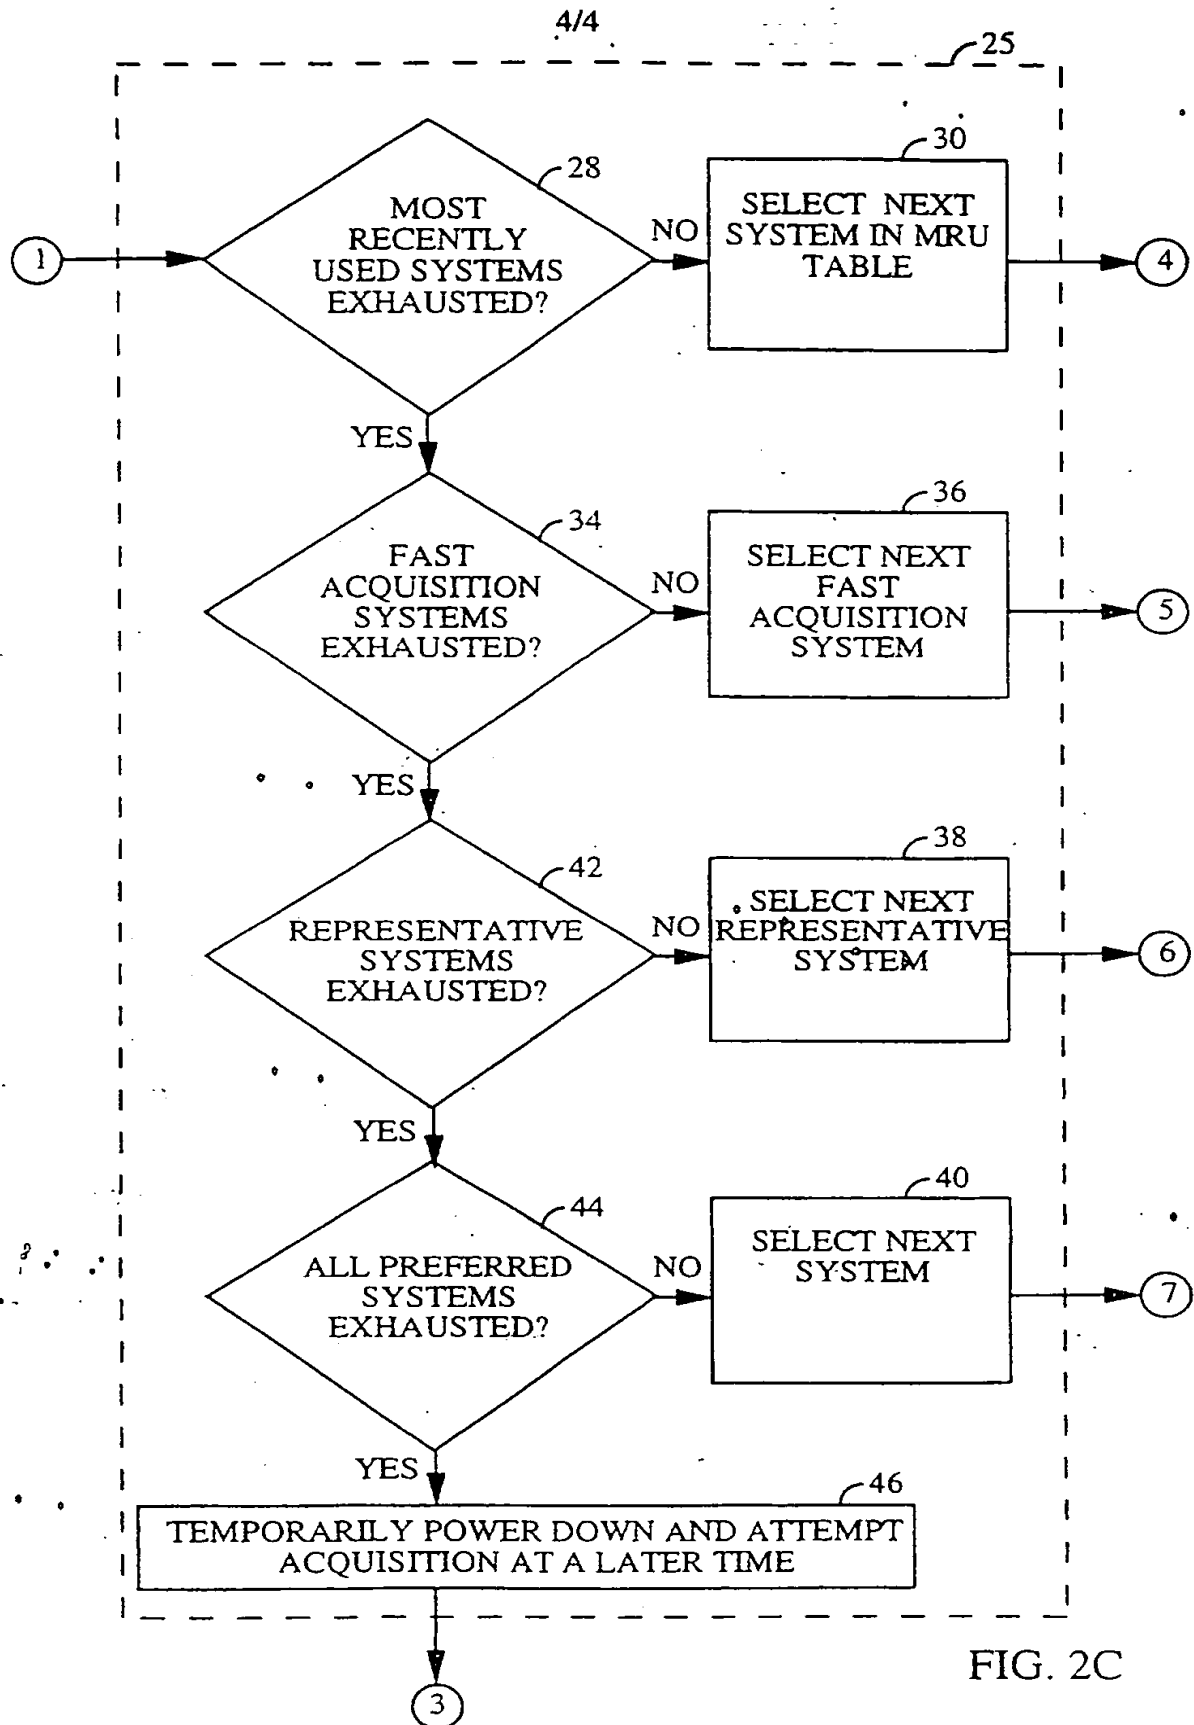


FIG. 2C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/06378

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 347 167 A (TOKYO SHIBAURA ELECTRIC CO) 20 December 1989 see column 6, line 13 - column 9, line 45 ---	1
X	PATENT ABSTRACTS OF JAPAN vol. 096, no. 001, 31 January 1996 & JP 07 245779 A (MATSUSHITA ELECTRIC IND CO LTD), 19 September 1995, see abstract ---	1
X	US 5 442 806 A (BARBER CLIFTON J ET AL) 15 August 1995 see abstract; figure 2 ---	1-10, 12; 13
X	WO 95 07010* A (NEDERLAND PTT ; LEIH GEORGE (NL); LENSINK ANDRE (NL); LEVELT WILLEM) 9 March 1995 see the whole document ---	1-10, 12, 13
-/-		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

22 August 1997

Date of mailing of the international search report

08.09.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Annibal, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/06378

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 916 728 A (BLAIR KEVIN B) 10 April 1990 see column 1, line 51 - line 57 see column 4, line 29 - column 5, line 37	1-3
A		4-10,12, 13
X	US 5 159 625 A (ZICKER ROBERT G) 27 October 1992 see abstract; claim 1	1-3
A		4-10,12, 13
P,X	US 5 586 338 A (LYNCH RICHARD ET AL) 17 December 1996 see abstract	1-10,12, 13
P,X	US 5 613 204 A (HABERMAN MICHAEL ET AL) 18 March 1997 see abstract see column 1, line 56 - line 62 see column 8, line 20 - column 10, line 38; figures 5,6	1-10,12, 13
P,X	PATENT ABSTRACTS OF JAPAN vol. 097, no. 001, 31 January 1997 & JP 08 251056 A (MATSUSHITA ELECTRIC IND. CO LTD) see abstract	1
E	EP 0 777 399 A (SONY CORP) 4 June 1997 see abstract	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/06378

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0347167 A	20-12-89	JP 1314442 A	19-12-89
		JP 1318326 A	22-12-89
		CA 1325039 A	07-12-93
US 5442806 A	15-08-95	NONE	
WO 9507010 A	09-03-95	NL 9301494 A	16-03-95
		AT 150928 T	15-04-97
		AU 7614694 A	22-03-95
		CA 2170525 A	09-03-95
		DE 69402327 D	30-04-97
		EP 0716797 A	19-06-96
		ES 2100740 T	16-06-97
		FI 960939 A	28-02-96
		JP 9502064 T	25-02-97
		NO 960784 A	19-03-96
US 4916728 A	10-04-90	NONE	
US 5159625 A	27-10-92	NONE	
US 5586338 A	17-12-96	NONE	
US 5613204 A	18-03-97	NONE	
EP 0777399 A	04-06-97	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.